

DIANA

Reference: FDM-6031-C

Control system: ZC - Standard




LUMINAIRE DESCRIPTION

Nominal type:	Non maintained
Duration of battery:	1 h
Luminous power:	35 lm
Emerg. lamp:	6 W G5
Ni-Cd battery:	2,4 V - 1,2 A/h
Power (mA):	20
Weigth (kg):	0.620

Technical features:

- "ZRM" (reg.) mounting system, without tools or screws. Mounting plate included.
- Signalling illumination by two H. B. and long life LEDs, monitoring two functions:
 - * Right LED on: mains present.
 - * Left LED on: charging correctly.
- Serie 2 incorporates in addition the new ambient signalling illumination by optical bifocal bar (10 years of life and lower consumption). Optionally it can be provided with optical bar either in vertical or horizontal concentrated luminous beam that provides 1 lux on the centre line of escape routes.
- According to EN 60598-2-22 and UNE 20-392-93.
- Housing according to EN 60598-1.
- New system ZST, with NS safety transformer, that fully charges the battery in 18 hours. For ZT/ZX/ZD control systems, the system ZBE charges battery in only 12 hours.
- Niquel-Cadmium high temperature batteries protected against over-intensity discharges.
- Mains supply 230 V - 50 Hz. Class IIA.
- Protected remote control connection.
- IP-44 weatherproof box available.
- IP-65 weatherproof kit available.
- Suitable to be mounted on flammable surfaces.

Photometric curve

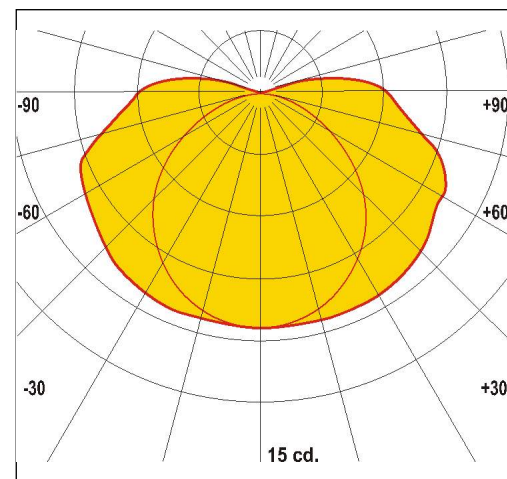

IP certification: 42-44-65

IK certification: 04



CCA



DIMENSIONS

